




CONCRETE PRODUCTS

GCP 585 GI (1000 gal.)

19604 - 67th Ave NE Arlington, Wa. 98223 Telephone (360) 435-5531 Fax (360) 435-8575

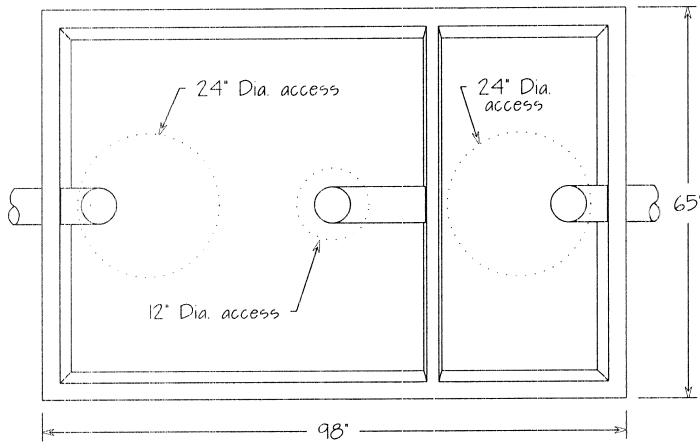

- * CONCRETE : 28 DAY COMPRESSIVE STRENGTH
f'c = 4000 psi PER ASTM C-33 AND C-150
- * REBAR : ASTM-615 & A-123 GRADE 60.
- * MESH : ASTM A-185 GRADE 88.
- * DESIGN : ASTM C-857 "MINIMUM STRUCTURAL DESIGN LOADING FOR UNDERGROUND PRECAST CONCRETE UTILITY STRUCTURES".
- * LOAD : H-20 TRUCK WHEEL WITH 30% IMPACT PER AASHTO.
- * REINFORCING PLACEMENT : 4x4 / 4 GAUGE THROUGHOUT BASE, #4 BAR IN CORNERS AND EDGES, #4 BAR 12" O.C. IN LIDS WITH 4 #4 BARS DIAGONALLY AROUND OPENINGS.
- * JOINT MATERIAL : MEETS FEDERAL SPECS 55-S-00210, AASHTO M-1988 AND ASTM C990.

