



TOP VIEW

GENERAL NOTES:

- TOTAL WEIGHT: 3,400 LBS
- CONCRETE: 28 DAY COMPRESSIVE STRENGTH FC: 4500PSI PER ASTM C-33 AND C-150
- REBAR: #4 ASTM A-615 & A-123 GRADE 60
- MESH: ASTM A-185 GRADE 88
- DESIGN: ASTM C-857 MINIMUM STRUCTURAL DESIGN LOADING FOR UNDERGROUND PRECAST CONCRETE UTILITY STRUCTURES
- HATCHES PER DISTRICT SPECIFICATIONS
- LOADS: SUITABLE FOR H-20 WHEEL LOADS IN OFF STREET LOCATIONS WHERE NOT SUBJECT TO HIGH DENSITY TRAFFIC
- REINFORCING PLACEMENT: 4X4 - 4GUAGE THROUGHOUT BASE, LID- #4 BARS 6" O.C. ALL SIDES AND 4-#4 BARS DIAGONALLY AROUND OPENING IN LIDS
- JOINT MATERIAL: MEETS FEDERAL SPECIFICATIONS SS-S-00210, AASHTO M-1988 AND ASTM C990
- CONFORMING TO 9-29.2 GAP ACCEPTANCE
- STANDARD GALVANIZED DIAMOND PLATE; SLIPNOT NON-SKID (AS NEEDED)

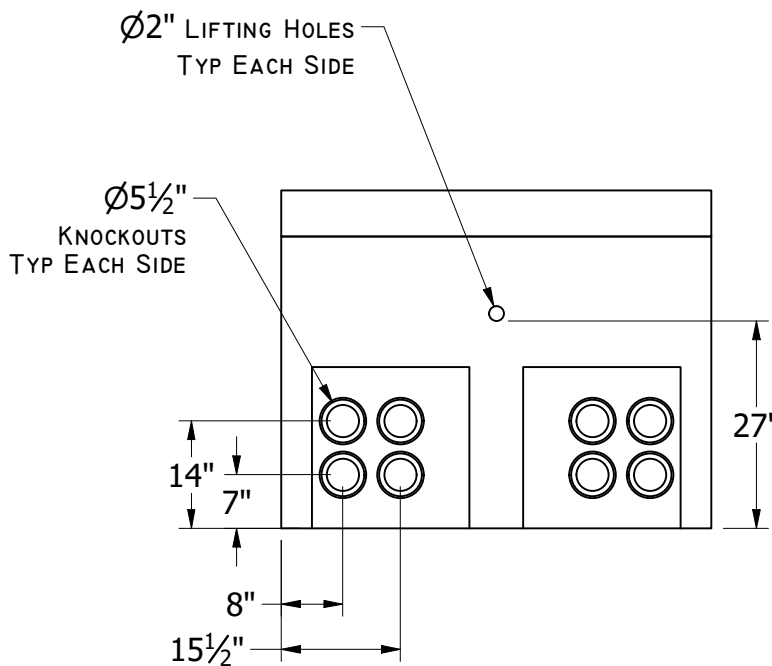

LEFT VIEW

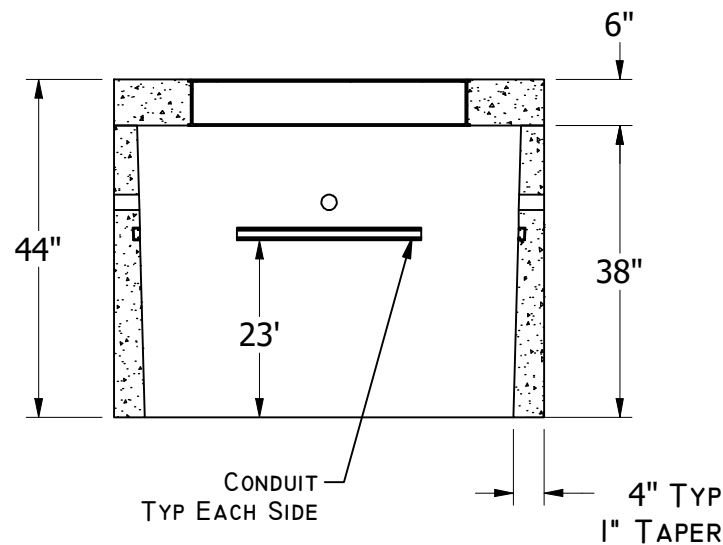

FRONT SECTIONAL VIEW