
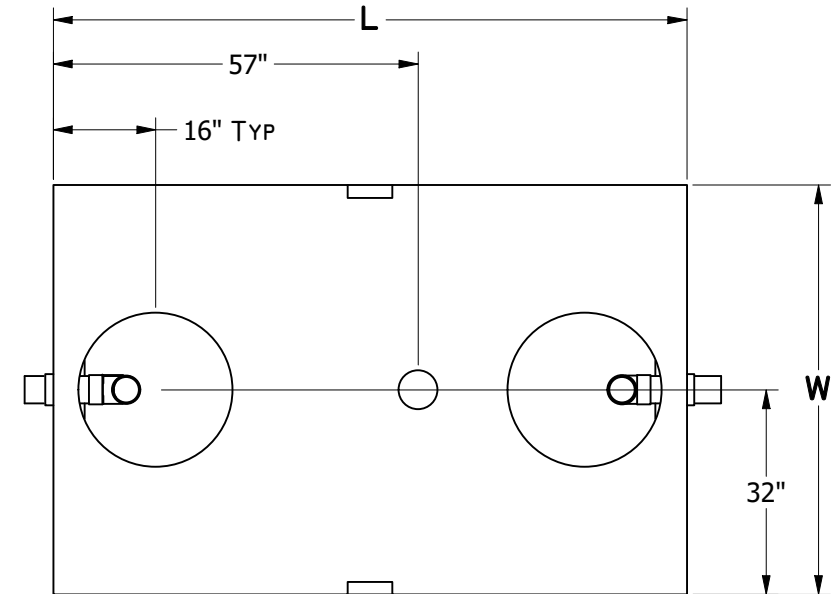


DOUBLE COMP. SEPTIC TANKS (1000 - 3000 gal.)

(H-20 LOAD)

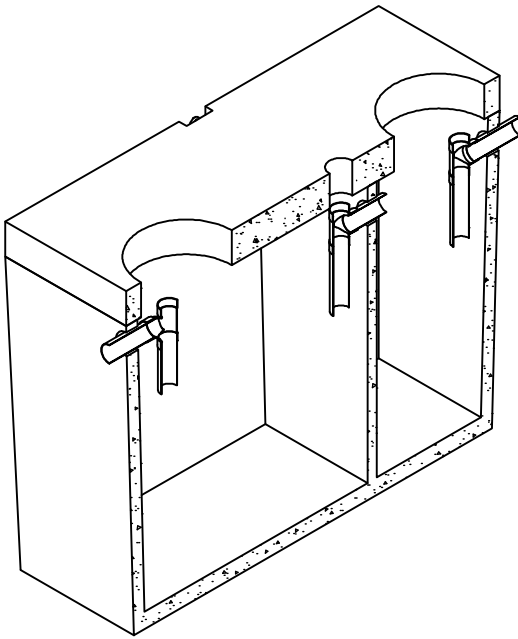


TOP VIEW

GENERAL NOTES:

- ALL DIMENSIONS IN INCHES
- H-20 TRAFFIC LID 8" THICK
- CONCRETE 28 DAY COMPRESSIVE STRENGTH FC: 7000PSI
- REBAR #4 ASTM A-615 GRADE 60
- DL: 36IN EARTH COVER
- LL: 25 SNOW
- SOILS: 2000PSI
- WATER PRESSURE: 62.4PSF
- FLEXIBLE PIPE ADAPTER PRESS SEAL 4IN CAST-A-STEEL
- JOINT MATERIAL MEETS FEDERAL SPECS. SS-S-002I
- RISERS AS REQUIRED

	L	W	H	I	O	Weight (lb)	SC (Gal./in)	LC (Gal./in)
1000 Gal.	99	64	69	54	51	11100	7.15	14.31
1250 Gal.	99	64	80	65	62	12200	6.73	13.46
1500 Gal.	114	72	80	65	62	12900	9.17	18.33
1750 Gal.	114	72	86	70	67	13300	8.93	17.86
3000 Gal.	151	86	92	76	73	23750	14.87	29.75

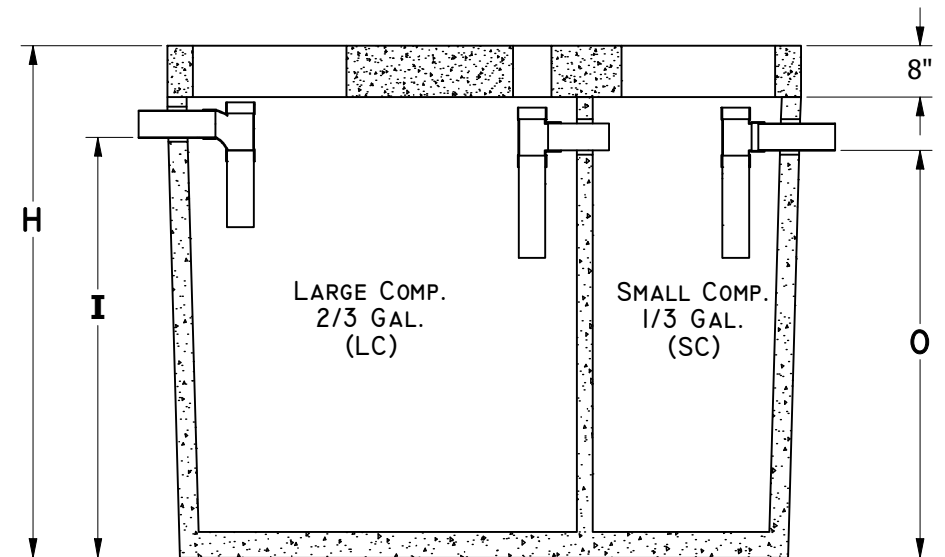

FRONT SECTIONAL VIEW