


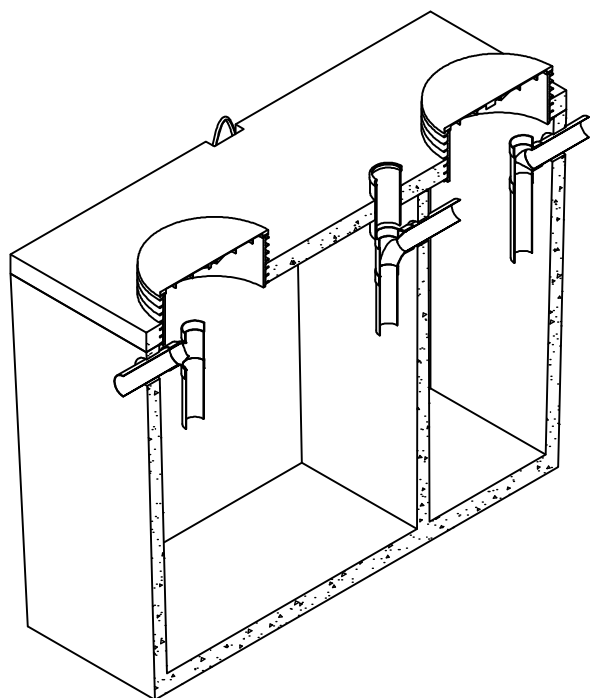


GENERAL NOTES:


- ALL DIMENSIONS IN INCHES
- CONCRETE 28 DAY COMPRESSIVE STRENGTH f_c : 7000PSI
- REBAR #4 ASTM A-615 GRADE 60
- DL: 36IN EARTH COVER
- LL: 25 SNOW
- SOILS: 2000PSI
- WATER PRESSURE: 62.4PSF
- FLEXIBLE PIPE ADAPTER PRESS SEAL 4IN CAST-A-STEEL
- JOINT MATERIAL MEETS FEDERAL SPECS. SS-S-002I
- RISERS AS REQUIRED

	L	W	H	I	O	Weight (lb)	SC (Gal./in)	LC (Gal./in)
1000 Gal.	99	64	65	54	51	9200	7.15	14.31
1250 Gal.	99	64	76	65	62	10300	6.73	13.46
1500 Gal.	114	72	76	65	62	12900	9.17	18.33
1750 Gal.	114	72	82	70	67	13300	8.93	17.86
3000 Gal.	151	86	88	76	73	23700	14.87	29.75

DOUBLE COMP. SEPTIC TANKS (1000 - 3000 gal.)

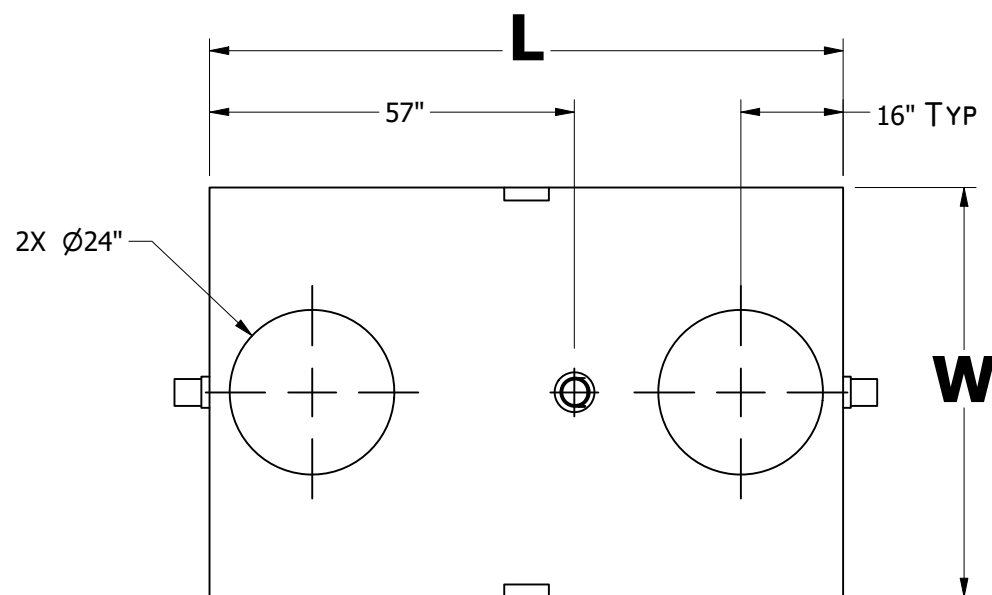

TOP VIEW

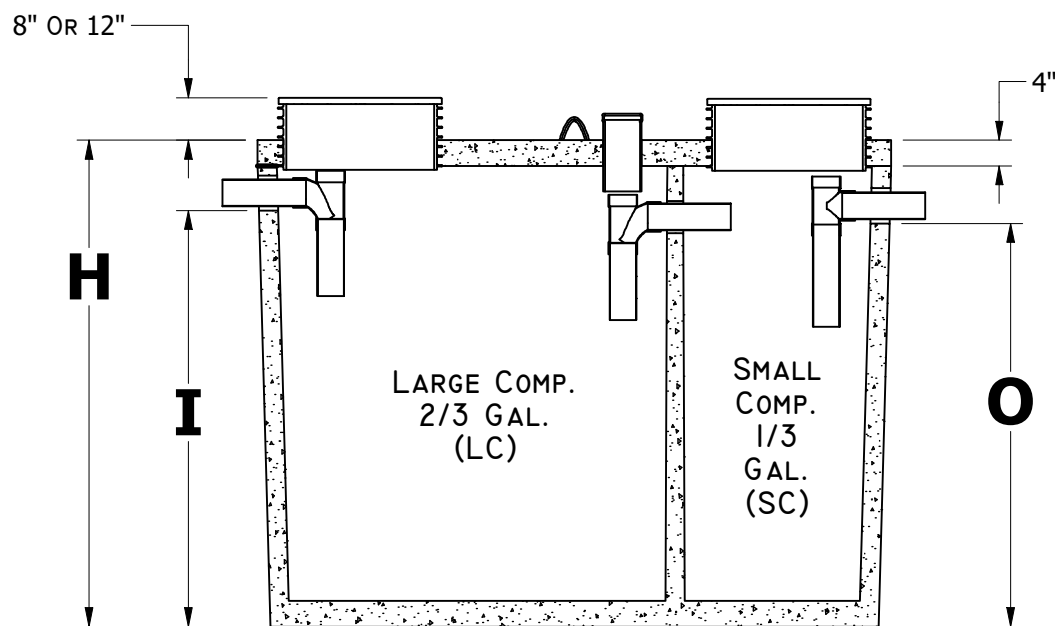

FRONT SECTIONAL VIEW