
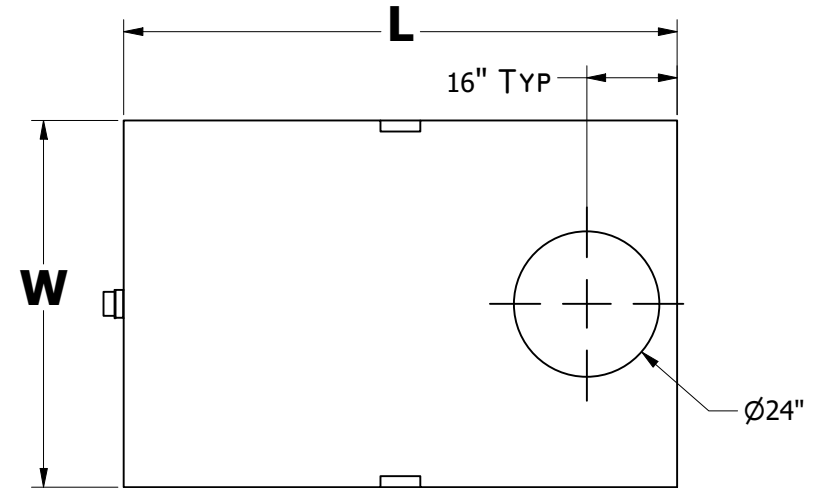


SINGLE COMP. HOLDING/PUMP TANKS (500 - 3000 gal.)

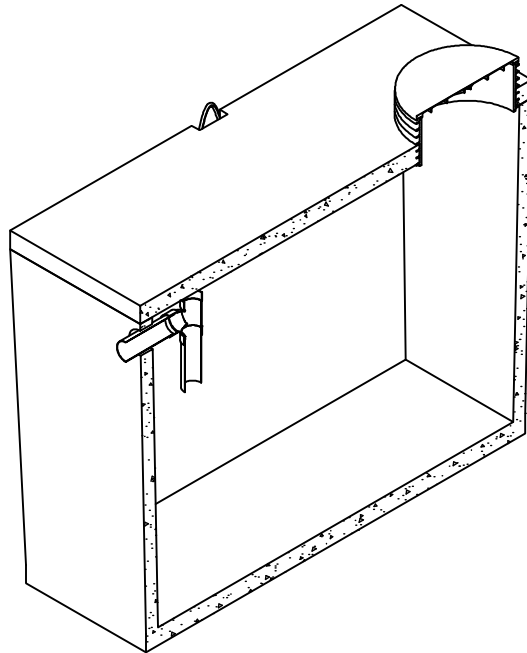


TOP VIEW

GENERAL NOTES:

- ALL DIMENSIONS IN INCHES
- IF H₂O TRAFFIC LID IS INSTALLED HEIGHT (H) IS RAISED 4IN
- CONCRETE 28 DAY COMPRESSIVE STRENGTH FC: 7000PSI
- REBAR #4 ASTM A-615 GRADE 60
- DL: 36IN EARTH COVER
- LL: 25 SNOW
- SOILS: 2000PSI
- WATER PRESSURE: 62.4PSF
- FLEXIBLE PIPE ADAPTER PRESS SEAL 4IN CAST-A-STEEL
- JOINT MATERIAL MEETS FEDERAL SPECS. SS-S-002I
- RISERS AS REQUIRED

	L	W	H	I	Weight (lb)	Gal./in
500 Gal.	64	54	65	52	5950	11.16
750 Gal.	73	64	65	52	6950	15.82
1000 Gal.	99	64	65	51	8950	22.07
1250 Gal.	99	64	76	62	9500	22.14
1500 Gal.	114	72	76	60	12200	28
1750 Gal.	114	72	82	68	12450	27.32
3000 Gal.	151	86	88	73	22300	45.18

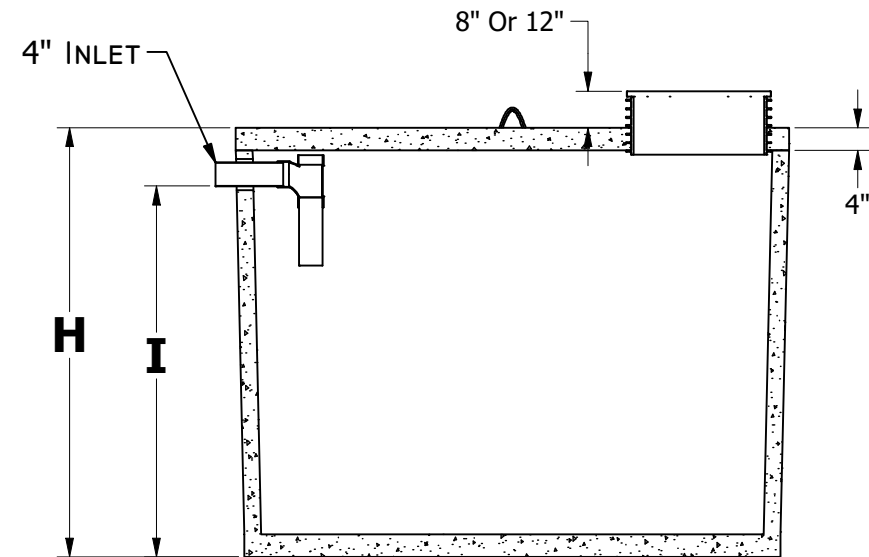

FRONT SECTIONAL VIEW