
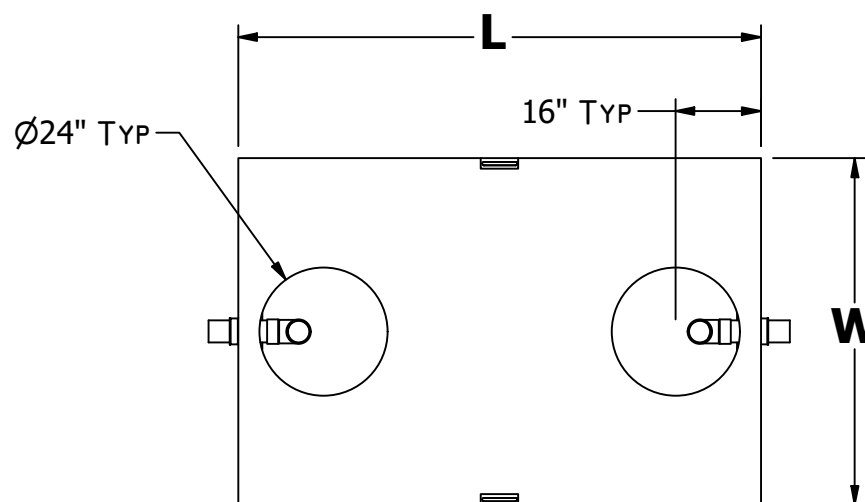


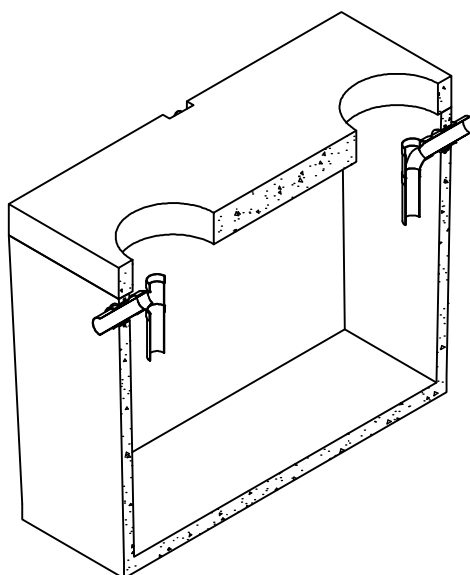


TOP VIEW

GENERAL NOTES:

- CONCRETE 28 DAY COMPRESSIVE STRENGTH FC: 4000PSI
- REBAR #4 ASTM A-615 GRADE 60
- DL: 36IN EARTH COVER
- LL: 25 SNOW
- SOILS: 2000PSI
- WATER PRESSURE: 62.4PSF
- FLEXIBLE PIPE ADAPTER PRESS SEAL 4IN CAST-A-STEEL
- JOINT MATERIAL MEETS FEDERAL SPECS. SS-S-002I
- RISERS AS REQUIRED

	L	W	H	I	O	Weight (lb)	Gal./in
500 gal.	64	54	69	54	51	7,200	11.16
750 gal.	73	64	69	54	51	8,200	15.82
1000 gal.	99	64	69	54	51	10,700	22.07
1250 gal.	98	65	81	70	67	11,200	22.14
1500 gal.	114	72	81	70	67	14,500	28
1750 gal.	114	72	86	70	67	14,850	27.32
3000 gal.	151	86	90	76	73	25,200	45.18

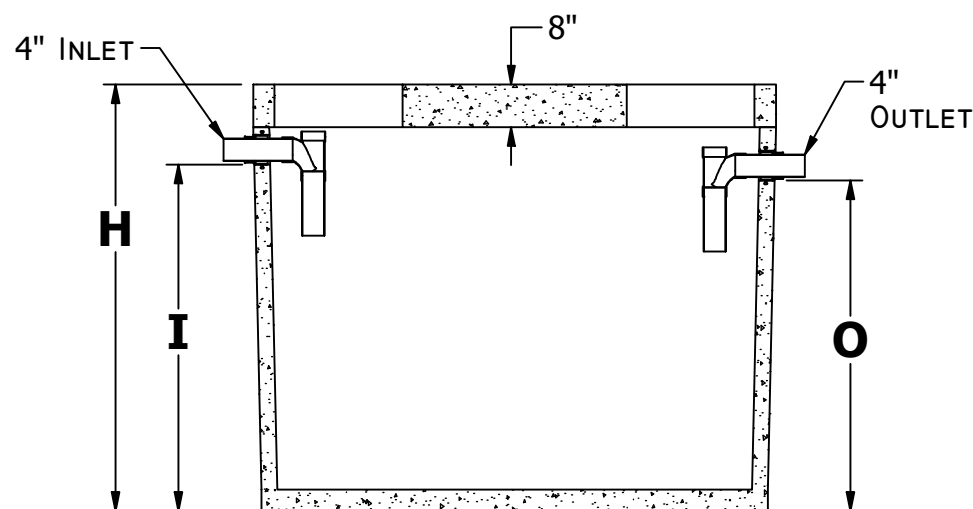

FRONT SECTIONAL VIEW