

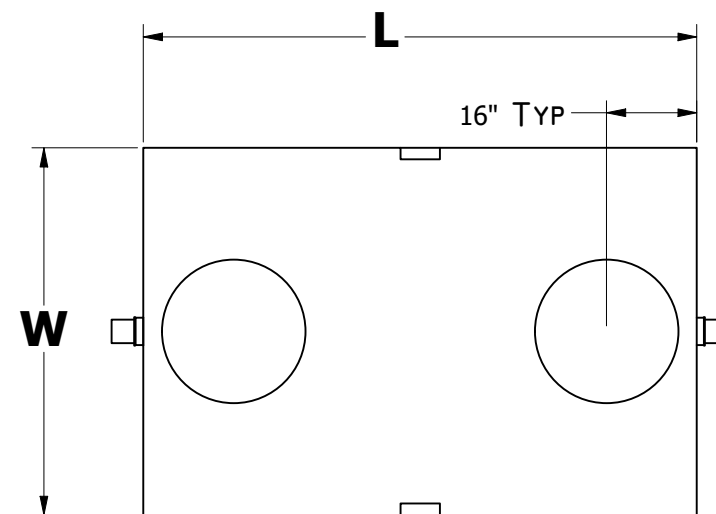


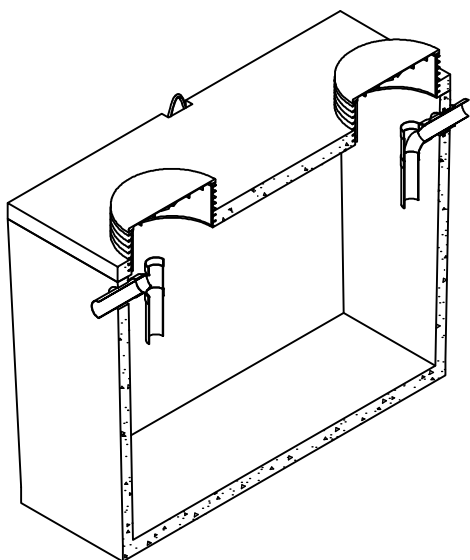

TOP VIEW

GENERAL NOTES:

- ALL DIMENSIONS IN INCHES
- IF H2O TRAFFIC LID IS INSTALLED HEIGHT (H) IS RAISED 4IN
- CONCRETE 28 DAY COMPRESSIVE STRENGTH FC: 4000PSI
- REBAR #4 ASTM A-615 GRADE 60
- DL: 36IN EARTH COVER
- LL: 25 SNOW
- SOILS: 2000PSI
- WATER PRESSURE: 62.4PSF
- FLEXIBLE PIPE ADAPTER PRESS SEAL 4IN CAST-A-STEEL
- JOINT MATERIAL MEETS FEDERAL SPECS. SS-S-002I
- RISERS AS REQUIRED

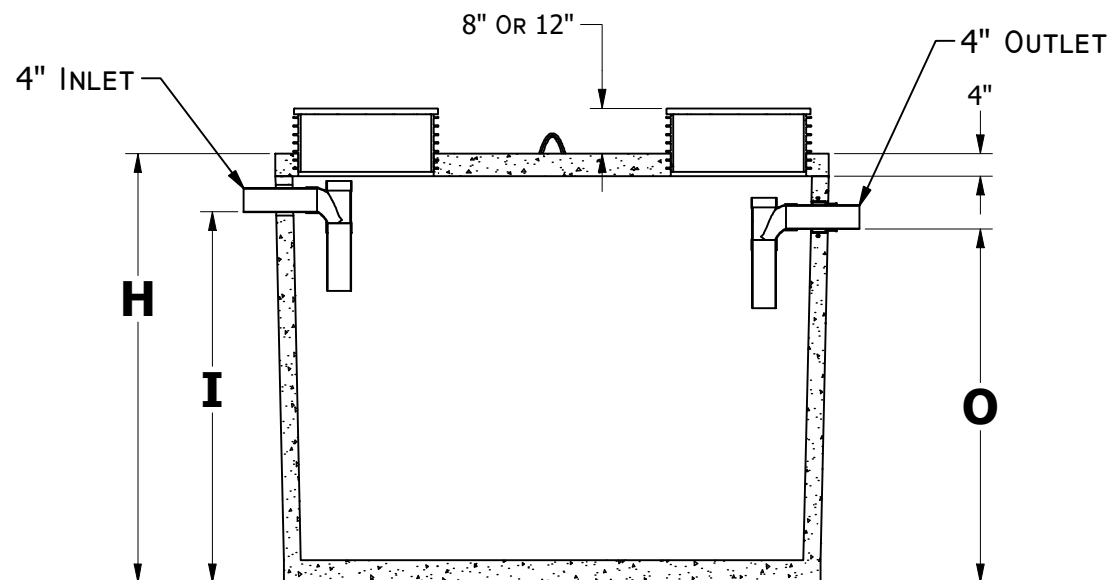

FRONT SECTIONAL VIEW

	L	W	H	I	O	Weight (lb)	Gal./in
500 gal.	64	54	65	54	51	5,800	11.16
750 gal.	73	64	65	54	51	6,800	15.82
1000 gal.	99	64	65	54	51	8,800	22.07
1250 gal.	98	65	76	65	62	9,350	22.14
1500 gal.	114	72	76	70	67	12,050	28
1750 gal.	114	72	82	70	67	12,300	27.32
3000 gal.	151	86	87	76	73	22,100	45.18