
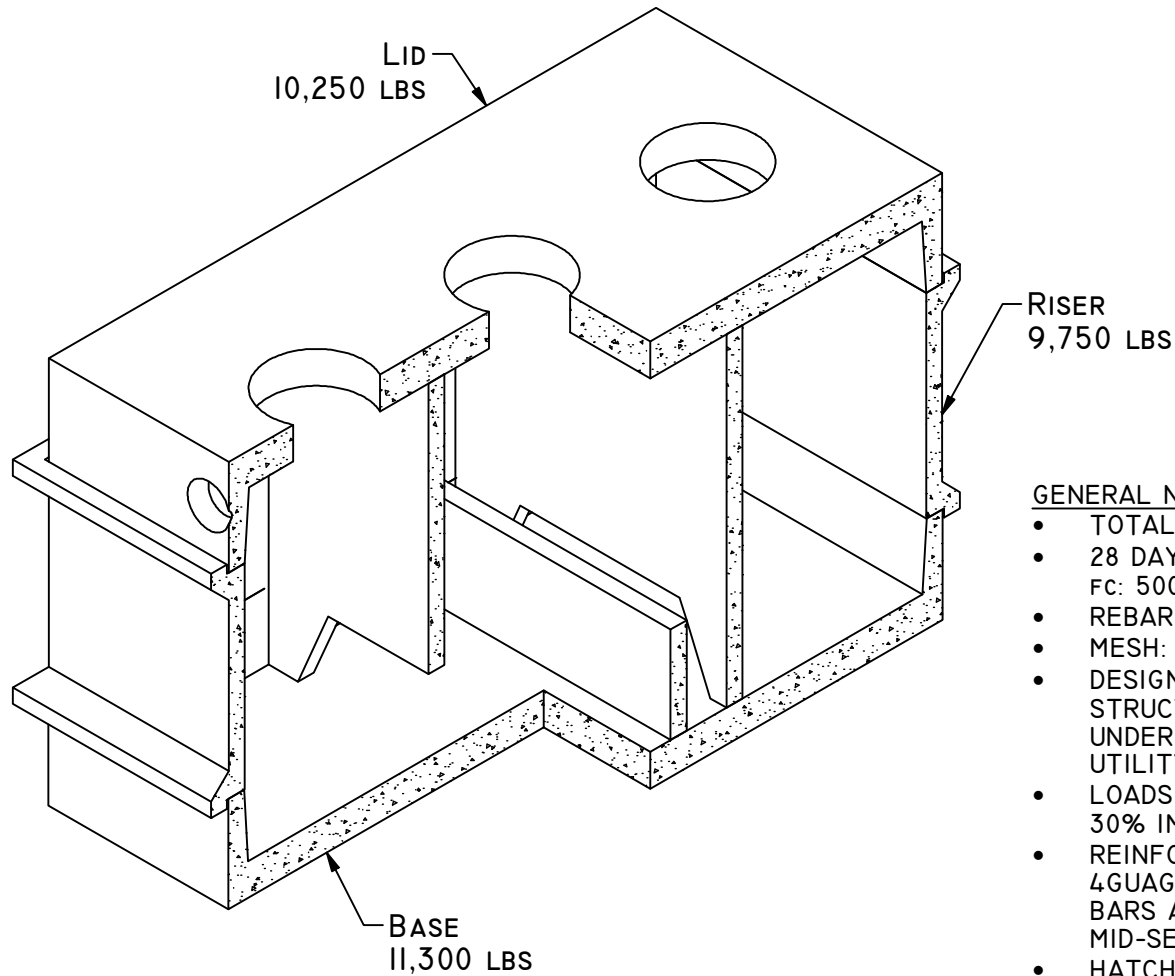


**GENERAL NOTES:**


- TOTAL WEIGHT: 31,300 LBS
- 28 DAY COMPRESSIVE STRENGTH FC: 5000PSI
- REBAR: #4 ASTM A-615 GRADE 60
- MESH: ASTM A-185 GRADE 88
- DESIGN: ASTM C-857 MINIMUM STRUCTURAL DESIGN LOADING FOR UNDERGROUND PRECAST CONCRETE UTILITY STRUCTURES"
- LOADS: H-20 TRUCK WHEEL WITH 30% IMPACT PER AASHTO
- REINFORCING PLACEMENT: 4X4 - 4GUAGE THROUGHOUT WITH 2 - #4 BARS ALONG BELL JOINTS IN MID-SECTION
- HATCHES PER DISTRICT SPECIFICATIONS
- JOINT MATERIAL: MEETS FEDERAL SPECIFICATIONS SS-S-00210, AASHTO M-1988 AND ASTM C990
- TRAFFIC RATED RISERS AS NEEDED

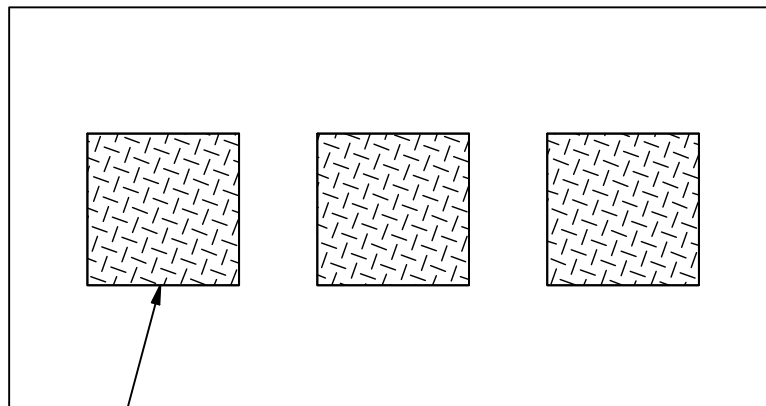


HATCHES PER DISTRICT SPEC.

OPTIONAL LID


WEIGHT: 9,400 LBS

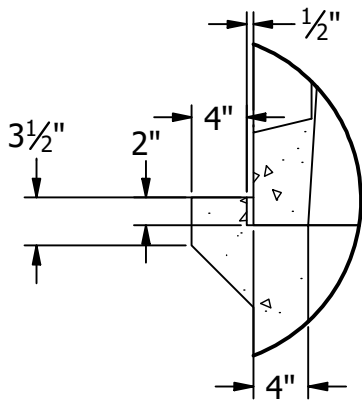


DETAIL C

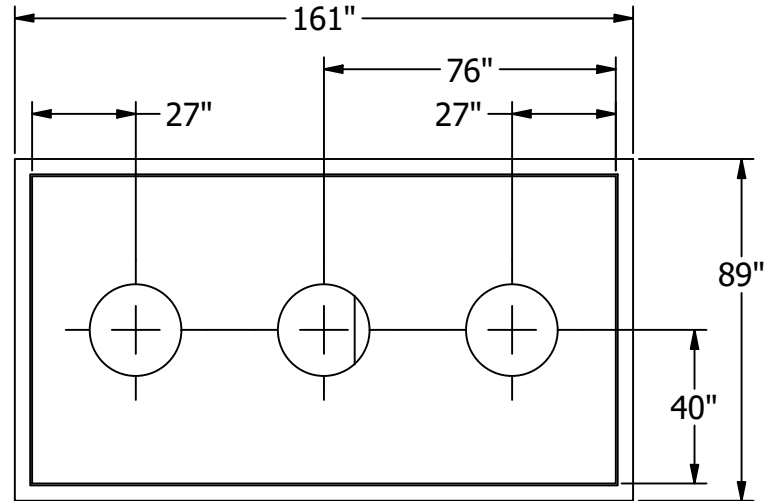

TOP VIEW

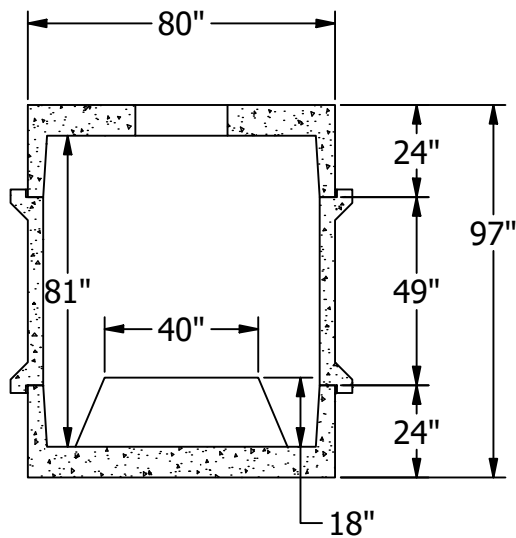

LEFT SECTIONAL
VIEW
SECTION C-C

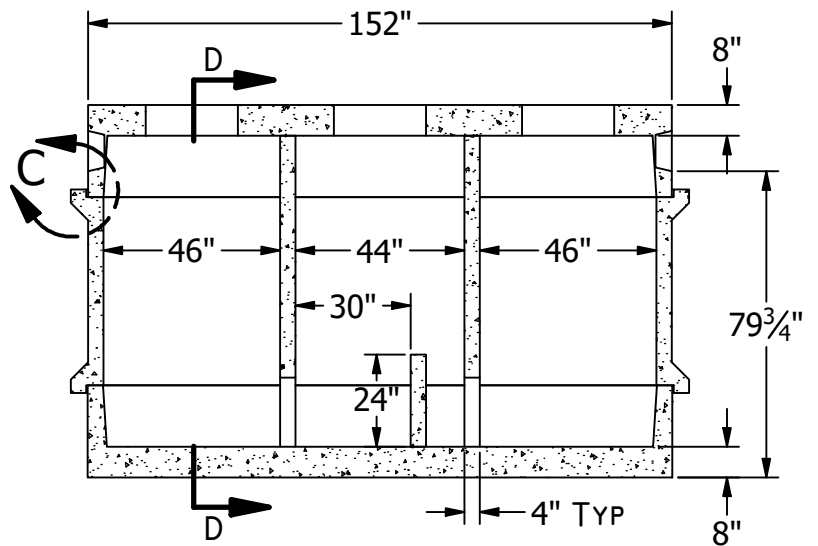

FRONT SECTIONAL VIEW