
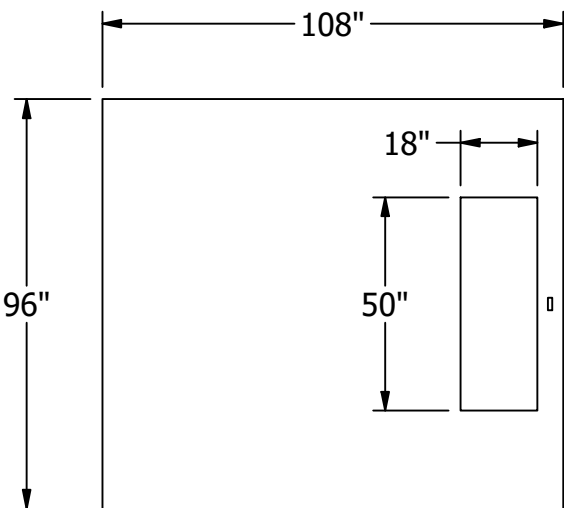



19604 67TH AVE NE ARLINGTON, WA 98223
(360) 435-5531 WWW.CUZCONCRETE.COM

GENERAL NOTES:


- CONCRETE: 28 DAY COMPRESSIVE STRENGTH $f_c = 5000\text{psi}$
- MESH: ASTM A-185 GRADE 88
- DL: 36" EARTH COVER
- LL: 25 SNOW
- SOILS: 2000psi
- WATER PRESSURE: 62.4psf
- DESIGN: ASTM C-857 "MINIMUM STRUCTURAL DESIGN LOADING FOR UNDERGROUND PRECAST CONCRETE UTILITY STRUCTURES"
- REINFORCING PLACEMENT: 4X4 - 4 GAUGE THROUGHOUT BASE. #4 GAUGE IN CORNERS & EDGES. 3 - #4 BAR EACH WAY IN LID
- REBAR: #4 ASTM A-615 GRADE 60
- MESH: ASTM A-185 GRADE 88
- JOINT MATERIAL: MEETS FEDERAL SPECIFICATIONS SS-S-00210, AASHTO M-198B AND ASTM C990

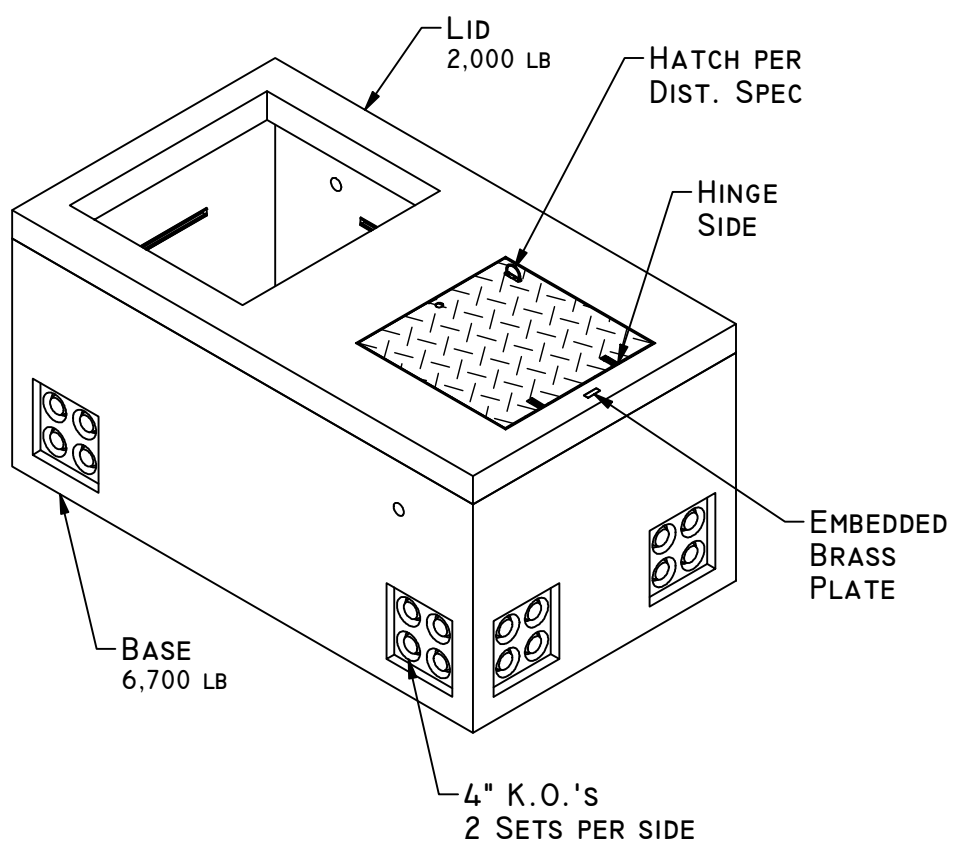


**OPTIONAL LID
594-89-5018
5,000 LB**

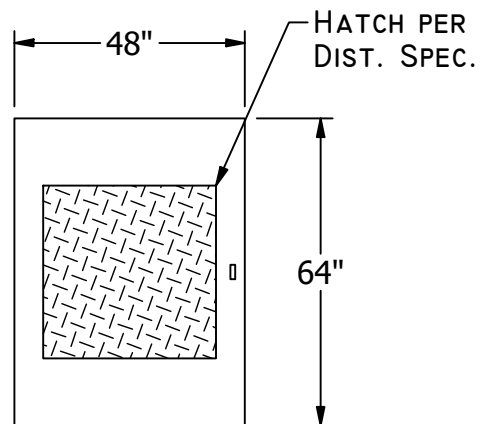


**OPTIONAL LID
594-H
900 LB**

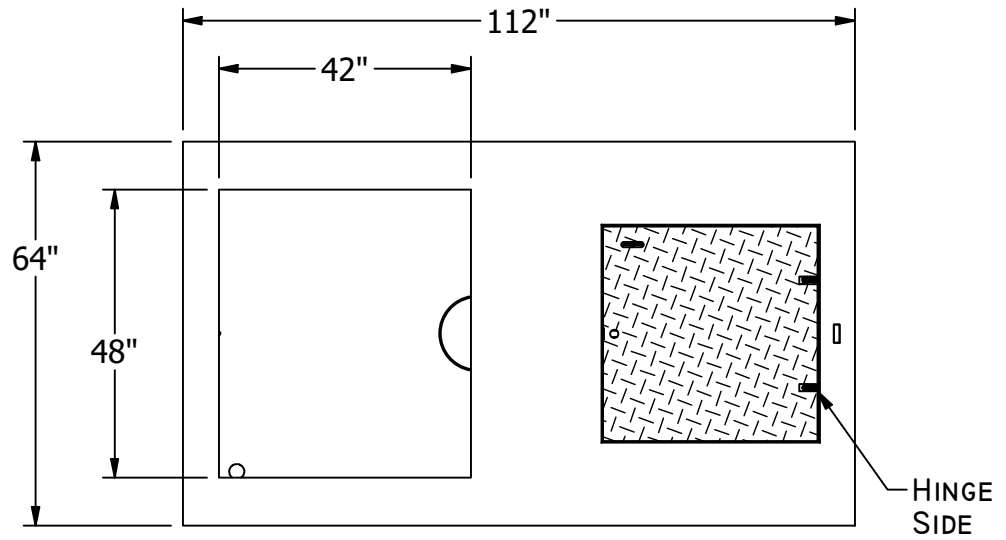

TOP VIEW

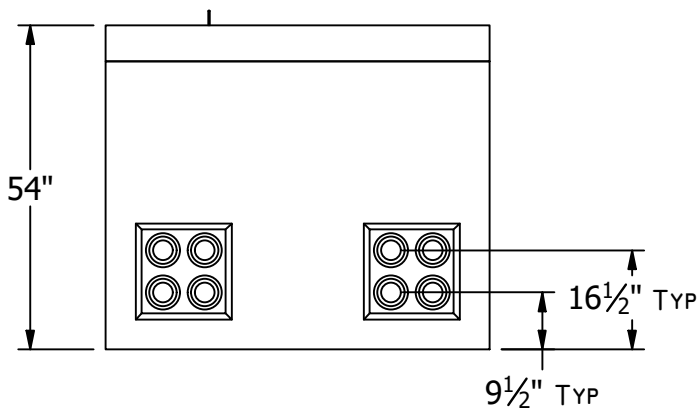

LEFT VIEW

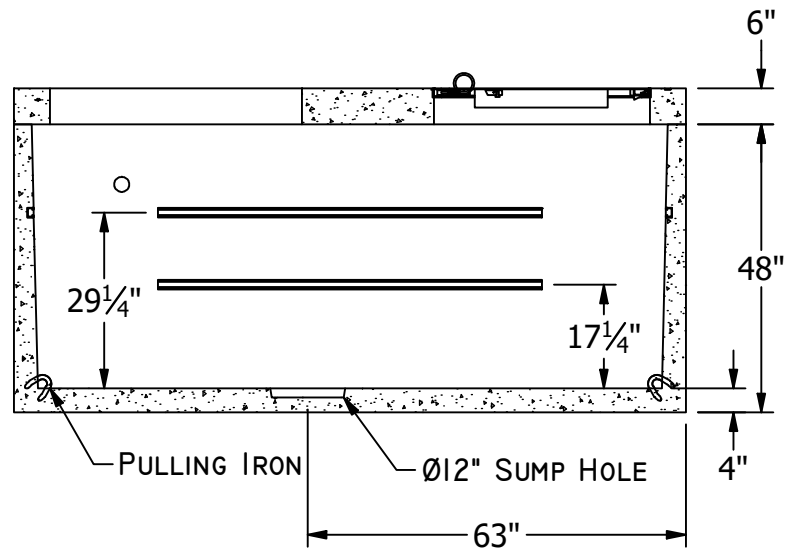

FRONT SECTIONAL VIEW