
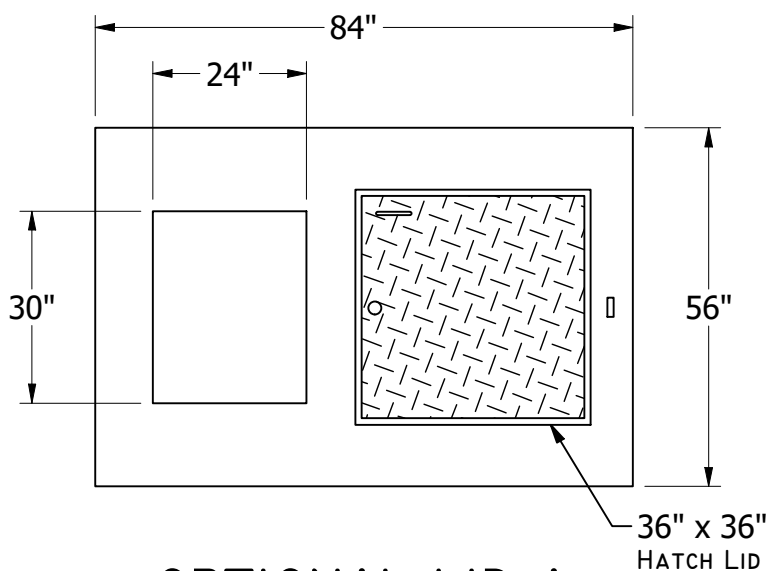


19604 67TH AVE NE ARLINGTON, WA 98223
(360) 435-5531 WWW.CUZCONCRETE.COM


GENERAL NOTES:

- APPROX. TOTAL WEIGHT:
7,500 LB
- CONCRETE: 28 DAY
COMPRESSIVE STRENGTH FC:
4500PSI PER ASTM C-33 AND
C-150
- REBAR: #4 ASTM A-615 &
A-123 GRADE 60
- MESH: ASTM A-185 GRADE
88
- DESIGN: ASTM C-857 -
MINIMUM STRUCTURAL DESIGN
LOADING FOR UNDERGROUND
PRECAST CONCRETE UTILITY
STRUCTURES
- HATCHES PER DISTRICT
SPECIFICATIONS
- LOADS: SUITABLE FOR H-20
WHEEL LOADS IN OFF STREET
LOCATIONS WHERE NOT
SUBJECT TO HIGH DENSITY
TRAFFIC
- REINFORCING PLACEMENT:
4X4 - 4 GAUGE THROUGHOUT
BASE, #4 IN CORNERS AND
EDGES, 3 - #4 BAR EACH WAY
IN LIDS
- JOINT MATERIAL: MEETS
FEDERAL SPECIFICATIONS
SS-S-00210, AASHTO M-1988
AND ASTM C990

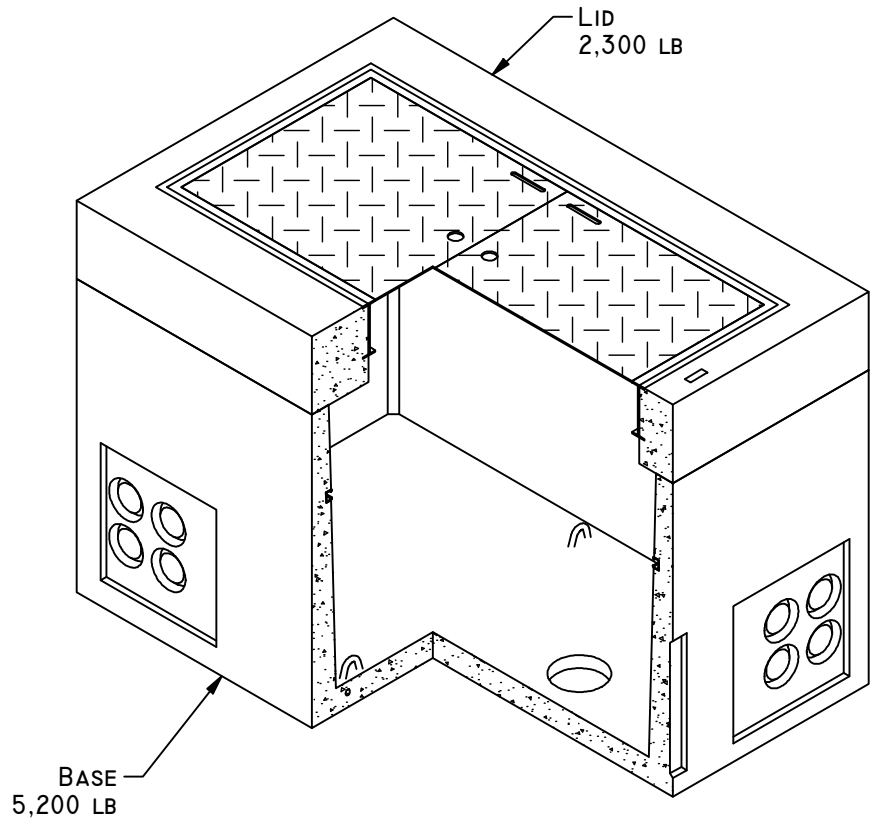


OPTIONAL LID A

DIST. CAT. ID 1000746
1,500 LB

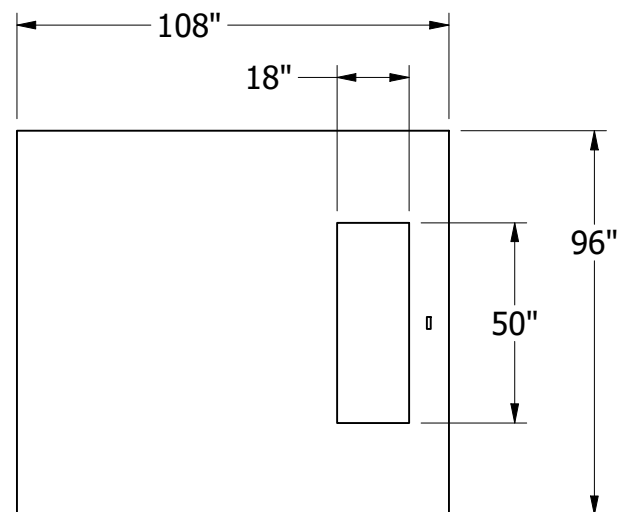


OPTIONAL LID B


DIST. CAT. ID 1001689
5,050 LB

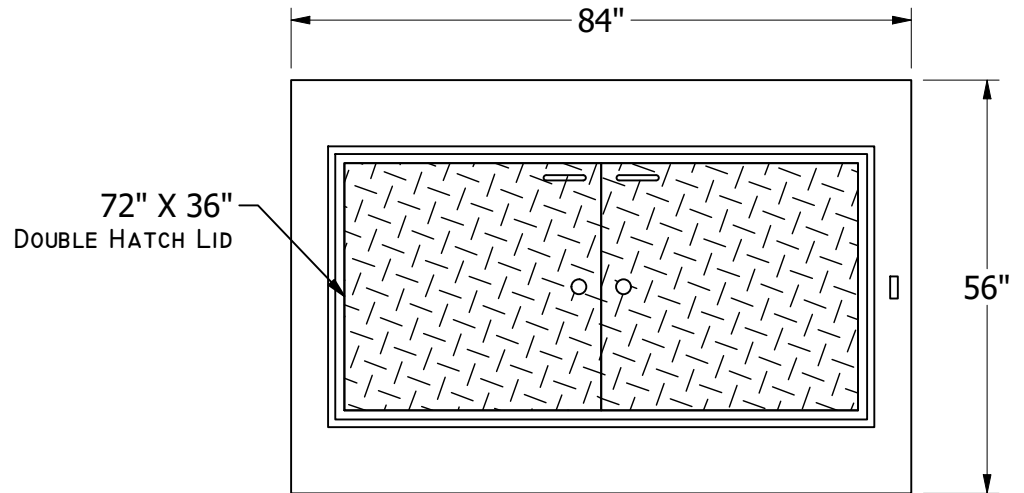

TOP VIEW

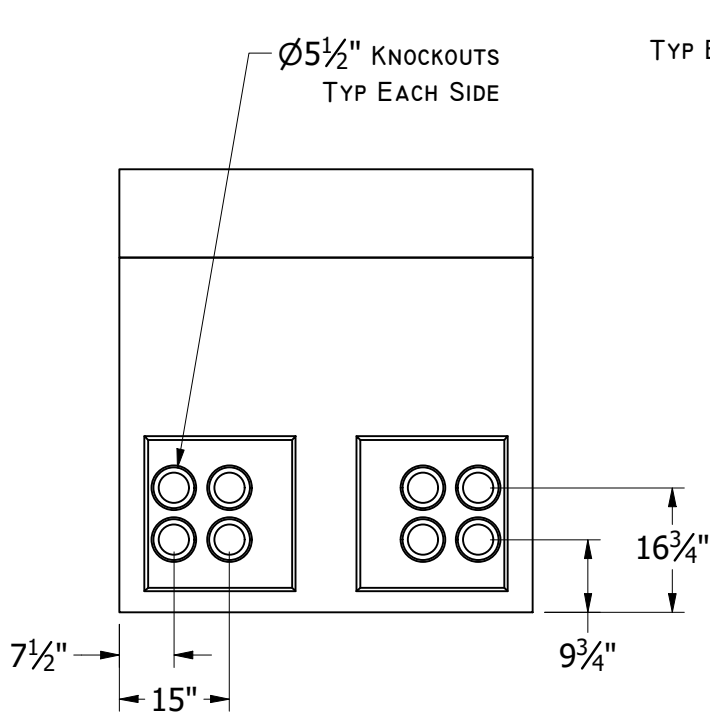

LEFT VIEW

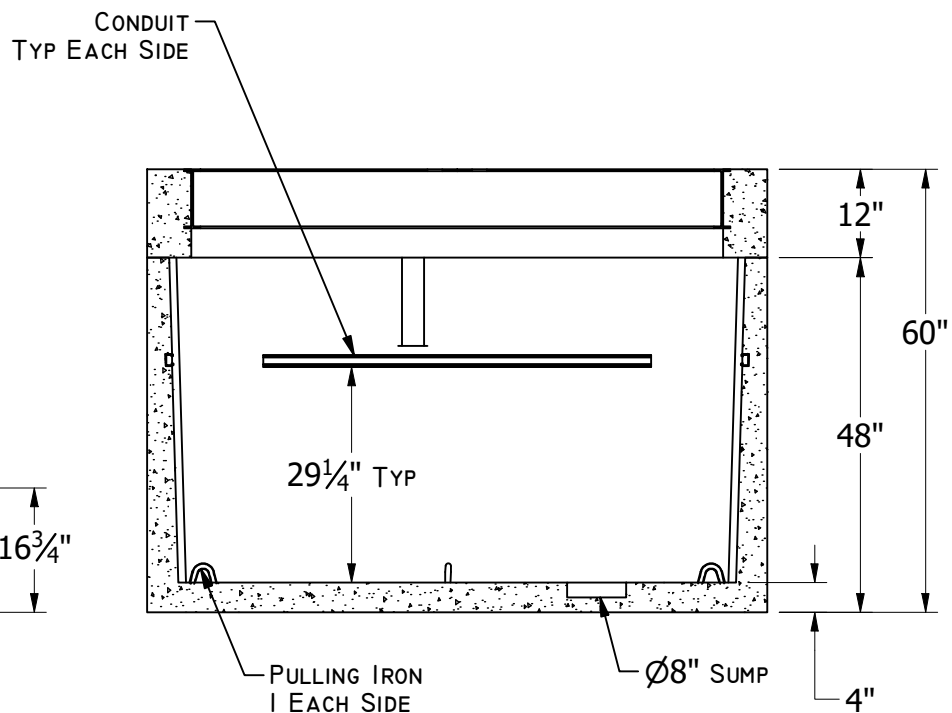

**FRONT SECTIONAL
VIEW**