
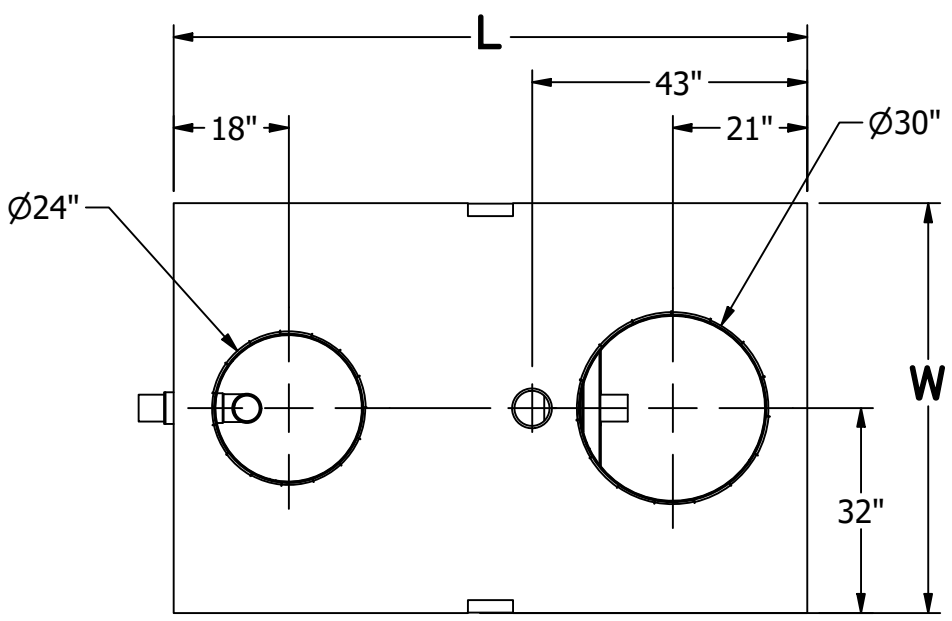


19604 67TH AVE NE ARLINGTON, WA 98223
(360) 435-5531 WWW.CUZCONCRETE.COM

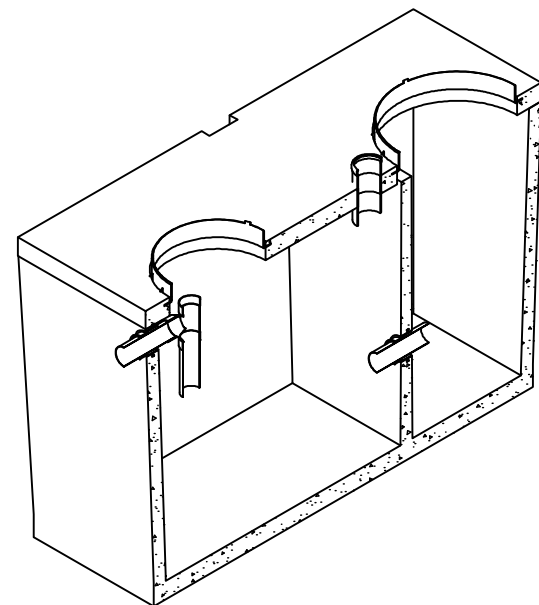


TOP VIEW

GENERAL NOTES:

- IF H₂O TRAFFIC LID IS INSTALLED HEIGHT (H) IS RAISED 4IN
- CONCRETE 28 DAY COMPRESSIVE STRENGTH FC: 4000PSI
- REBAR #4 ASTM A-615 GRADE 60
- DL: 36IN EARTH COVER
- LL: 25 SNOW
- SOILS: 2000PSI
- WATER PRESSURE: 62.4PSF
- FLEXIBLE PIPE ADAPTER PRESS SEAL 4IN CAST-A-STEEL
- JOINT MATERIAL MEETS FEDERAL SPECS. SS-S-002I
- RISERS AS REQUIRED

	Weight (lb)	SC (Gal./in)	LC (Gal./in)	L	W	H	I
1000 Gal.	9050	7.15	14.31	99	64	65	54
1250 Gal.	10050	6.73	13.46	99	64	76	65
1500 Gal.	12750	9.17	18.33	114	72	76	65
1750 Gal.	13150	8.93	17.86	114	72	82	70
3000 Gal.	22550	14.87	29.75	151	86	92	76

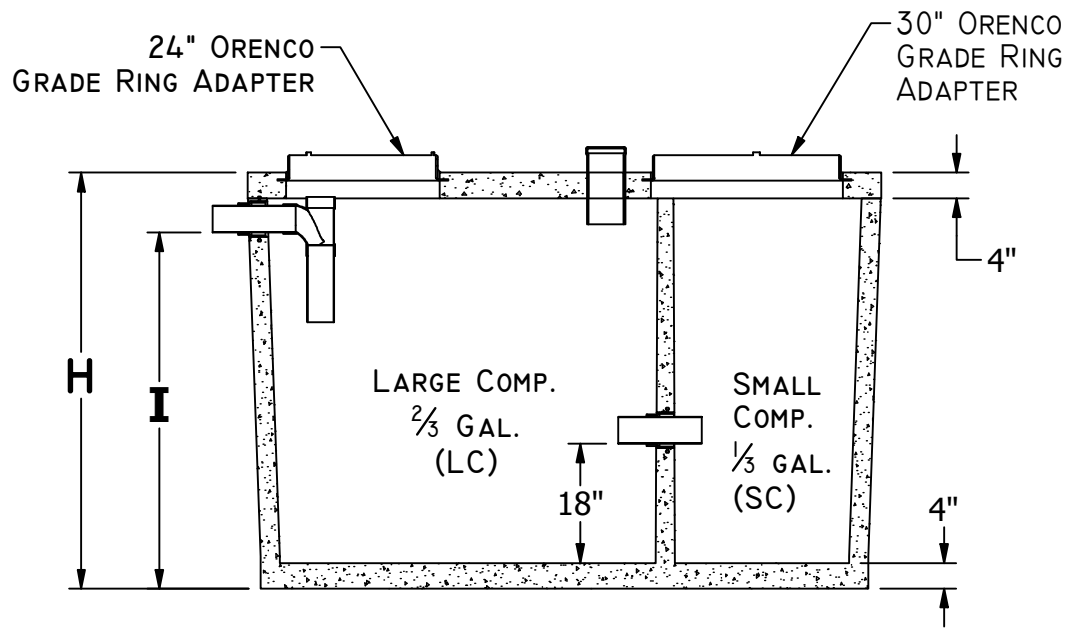

FRONT SECTIONAL VIEW