
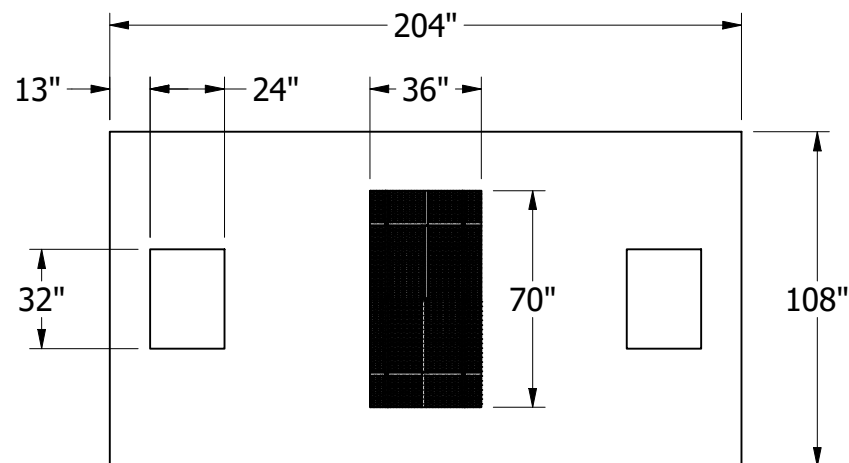



19604 67TH AVE NE ARLINGTON, WA 98223
(360) 435-5531 WWW.CUZCONCRETE.COM

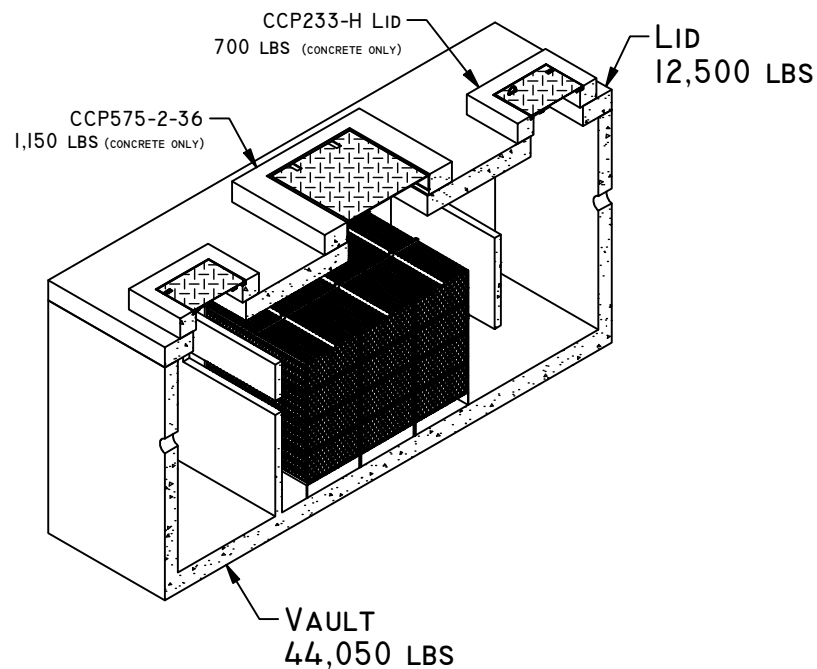


TOP VIEW
LID OMITTED FOR VISIBILITY

GENERAL NOTES:

- CONCRETE: 28 DAY COMPRESSIVE STRENGTH FC: 7000 PSI
- REBAR: #4 ASTM A-615 GRADE 60
- MESH: ASTM A-185 GRADE 88
- DESIGN: ASTM C-857 "MINIMUM STRUCTURAL DESIGN LOADING FOR UNDERGROUND PRECAST CONCRETE UTILITY STRUCTURES"
- LOADS: H-20 TRUCK WHEEL WITH 30% IMPACT PER AASHTO
- REINFORCEMENT: REBAR: #4 ASTM A-615 GRADE 60 REBAR 12" O.C. THROUGHOUT BASE AND TOP SECTIONS, 4"X4"/4 GAUGE MESH WITH 2-#4 REBAR RUNNING HORIZONTALLY HATCHES PER DISTRICT SPECIFICATIONS
- JOINT MATERIAL: MEETS FEDERAL SPECIFICATIONS SS-S-00210, AASHTO M-1988 AND ASTM C990

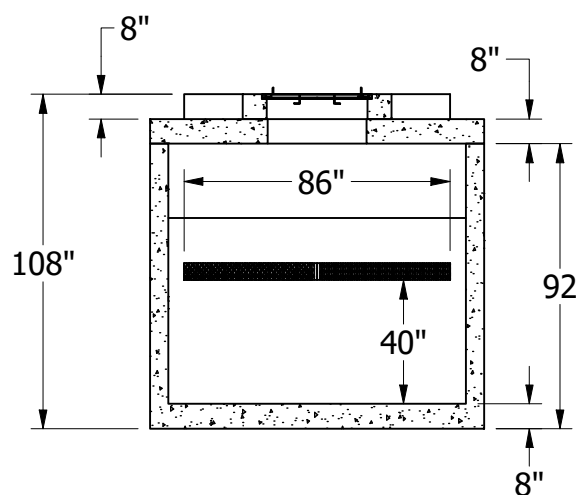

LEFT SECTIONAL VIEW
SECTION B-B

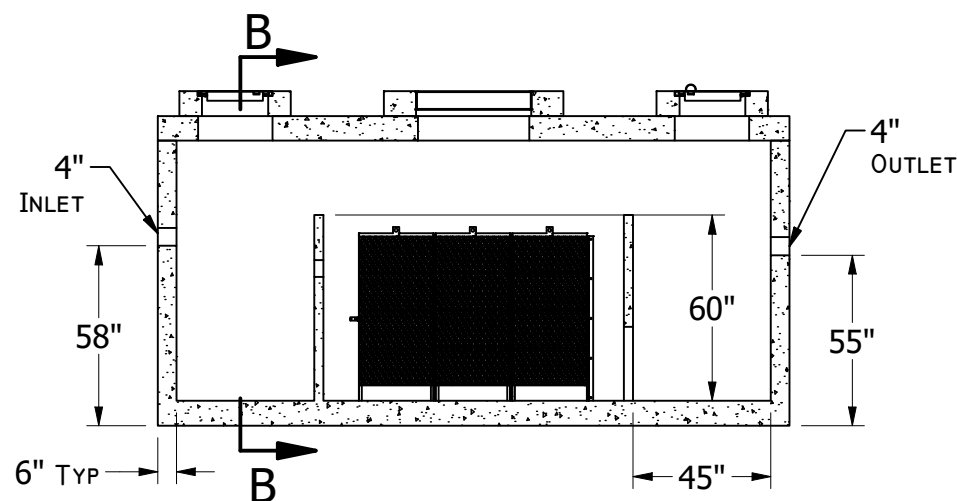

FRONT SECTIONAL VIEW